


NOTICE

Do not at any time attach wear insert or remove wear insert from seed firmer while attached to planter. Remove seed firmer while doing maintenance. Beware of all pinch points. Do not backup planter while firmer is down. Always be moving forward when lowering planter.

7000 & 7200 John Deere Planter - Seed Firmer Instructions

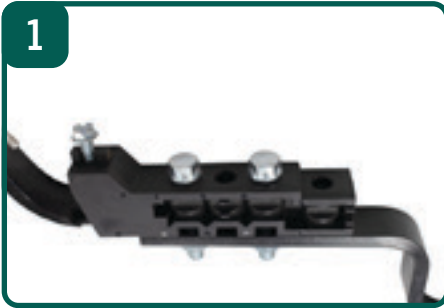

Bolt location

Leave the first hole empty at the top of the firmer adapter and place the bolts in the 2nd and 4th openings.¹



Bolt location

Above highlights the bolt location for the firmer block and S bar. Connect using 2 standard hex bolts in the 2nd and 4th hole openings.¹



Bolt & spacer location

Above highlights the bolt location for the firmer block and the S bar. Place the bolts in the 1st and 3rd hole openings.¹



Spacer placement

Place the spacer in between the scraper holes and the firmer block like shown.



Tighten bolts

Tighten the bolts to ensure that the spacer and attached piece stay in place.



Final view

Above shows the final view of the attached piece.

¹Adjust location of bolts on the mounting bracket and blocks to fit your pressure and soil conditions.

Warranty: Flo-rite Seed Firmers are warranted to be free of defects in material and workmanship for one year from date of installation, any other warranty, such as merchantability or fitness for a particular purpose, is expressly disclaimed. Our obligation under this warranty shall be limited to repairing or replacing, free of charge to the original purchaser, any part that in our judgment shall show evidence of such defect, provided further that such part shall be returned within thirty (30) days from the date of failure – routed through the dealer from whom the purchase was made. Shipping charges prepaid. Covered by U.S. Patent No. 9,565,797 and other pending U.S. and International Patents.

Flo-rite Seed Firmers shall have no liability of any kind, except for the warranty above, on account of any of its products and shall not be liable for special or consequential damages. Flo-rite Seed Firmers shall not be liable for indirect, incidental or consequential damages or injuries including but not limited to loss of crops, loss of profits, rental of substitute equipment, planting delays, any expense or loss incurred for labor, other commercial loss or for any other reason. Covered by U.S. Patent No. 9,565,797 and other pending U.S. and International Patents.

WARNING: Never backup planter with seed firmers down. This may break and/or damage firmer or wear inserts.

*7000 & 7200 John Deere Planters is a trademark of DEERE & COMPANY CORPORATION.